


How to Assemble an L-Shape Base Cabinet



Feeling lost?

Watch the How-To
video here:

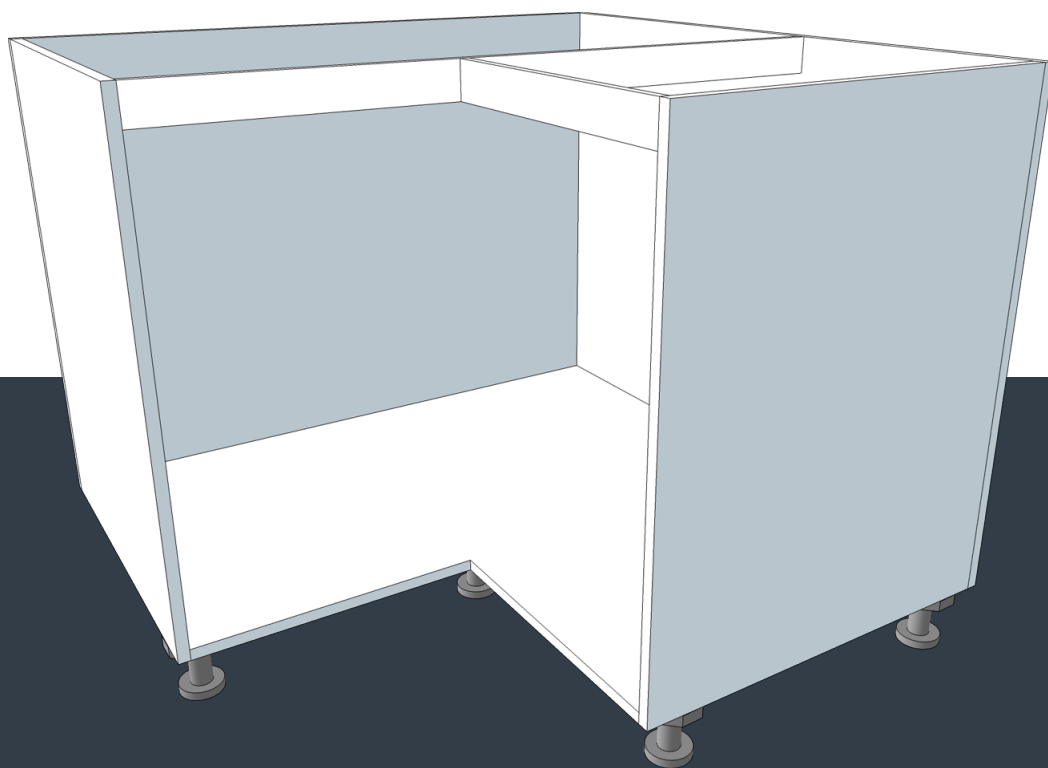


Tools Required:



Glue Bottle




Cordless Drill



Mallet



Adjustable Square



Pencil




Tape Measure

Step 1:

Collect all of the required parts for your goFlatpacks product. You will need:

1. Bottom Panel
2. Back Left Panel
3. Back Right Panel
4. Left Panel
5. Right Panel
6. Top Rail (x2 pieces)
7. Wood Screws
8. Adjustable Feet (if supplied)

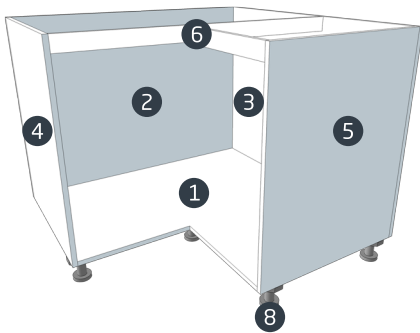

Step 2:

Glue along the side of the **Back Panel** that butts into the other **Back Panel**. Here, we are gluing along the right edge of the **Left Back Panel**.



Step 3:

Lift up your panels to create an L shape, making sure that both your **Back Panels** are facing up.

Check to make sure the cabinet connector holes are at the top edge of the back panels. Square off panels and screw into position.



Step 4:

Glue along the bottom inside edge of both the **Left** and **Right Back Panels**.



Step 5:

Position the **Bottom Panel** in place, ensuring that any adjustable feet holes are facing towards the bottom.

Square off panels and screw into position along the base for both the **Left** and **Right Back Panels**.



Step 6:

Place the glued edges of the **Right Panel** into position against the **Bottom Panel** and **Right Back Panel**.

Square off panel and screw into position along all attachment points.



Step 7:

Repeat Step 6 for the **Left Panel**.



Step 8:

Place the long and the short **Top Rail** in the 'T-shape' position that you require. It is a good idea to position this inside your cabinet so that you can visualise the way in which it will be assembled.

This will be attached to both the **Side Panels** as well as the **Back Panel** that has the attachment points in it.



Step 9:

Measure from the inside of your cabinet's **Back Panel**, to the front of the **Side Panel** where the smaller rail will be attached.

This measurement is then transferred onto the long rail piece, to mark the position where the smaller rail will be attached.




Step 10:

Place the smaller **Top Rail** on the inside of the marking on the long **Top Rail**.




Step 11:

Drill a pilot hole to avoid splitting the wood and then fix the two parts of the **Top Rail** in place with a screw.

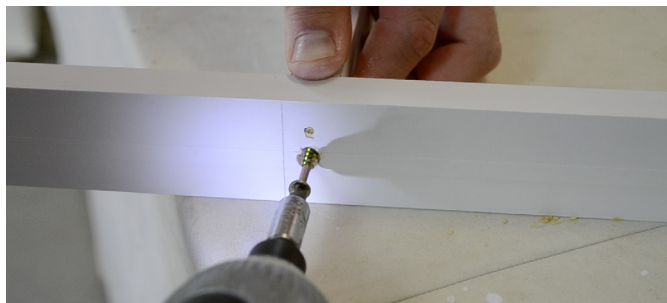

Step 12:

Glue each end of the **Top Rail** and affix into each attachment point along the **Left** and **Right Side Panels** as well as the **Back Right Panel**.

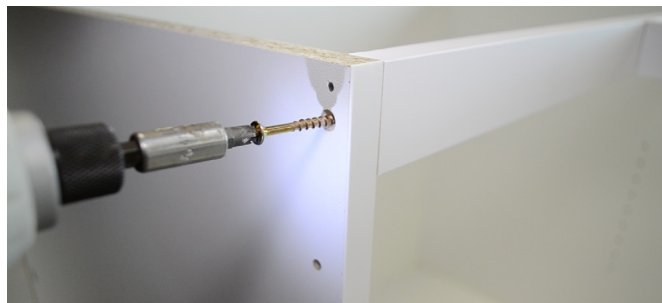

Step 13:

Congratulations! Your goFlatpacks **L-Shape Base Cabinet** carcass is complete.

